

HID Fixtures

Bell Lighting Technologies Inc.



LF Series

Seismic Mounting - Dry Application



The LF Series comes fully assembled and complete with:

Quad Series Ballast, 120/208/240/277 V or Tri-Tap 120/277/347 V in 50 or 60 Hz.

4mm Tempered Safety Glass panel or optional 4mm Tempered Pinhead Safety Glass.

Pre-wired, including a 1.6m Pigtail


Full seismic CSA/UL ceiling mount kit including adjustable chain links and four 1m pre-cut suspension chains.

The LF Series is manufactured from the highest quality ISO Marine Aluminum and is completely welded for superior structural strength. Alternate optional equipment may be available upon request.

Metal Halide	NSN
250 Watt LF250 SM-DR-MH	
400 Watt LF400 SM-DR-MH	
1000 Watt LF1000 SM-DR-MH	
1000 Watt LF1000 SM-DR-MH Compact	
High Pressure Sodium	
250 Watt LF250 SM-DR-HPS	
400 Watt LF400 SM-DR-HPS	
1000 Watt LF1000 SM-DR-HPS	

BC Light has developed the LF1000 (Compact) fixture for those applications where concentrated light intensity is required. By combining a smaller reflector (used in the LF250, LF400 and LF600 fixtures) with Venture Lighting's reduced jacketed 1000w metal halide lamp they can provide the same total lumen output as their regular LF1000 fixture, concentrated on a tighter grid.


**LF 250 / 400 / 600
LF 1000 Compact**

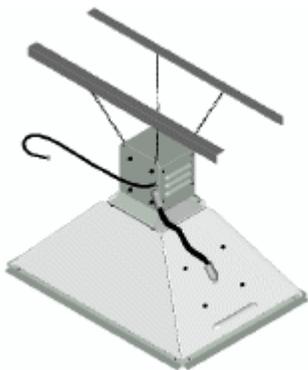

58.4 cm x 40.6 cm x 45.7 cm
Approximate Weight 16.81 Kg / 37 lbs
(LU 1000 Compact 26.8 Kg / 59 lbs)



LF 1000

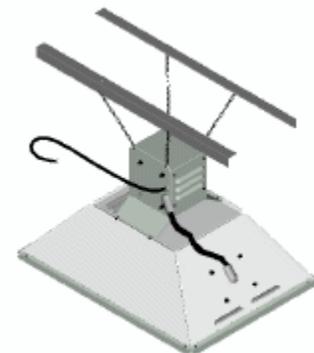

76.2 cm / 55.9 cm / 45.7 cm
Approximate Weight 26.8 Kg / 59 lbs