

Emergency Lighting Units



 **Model R-1**




Emergency Lighting Unit - Model R-1

Decorative and economical unit with “EZ” install back plate feature has modern appearance and low maintenance

Features

- Completely self-contained
- Fully Automatic Operation
- Compact, low profile design in neutral finish.
- Universal mounting plate with “EZ” Quick Connect for rapid labor saving installation.
- Push to test switch.
- 6-Volt, pure lead, maintenance-free battery.
- Environmentally-coated, solid state charger.
- Automatic, low voltage disconnect (LVD).
- Universal transformer for 120 or 277 VAC.
- Listed for damp location
- Injection-molded, V-O flame retardant, high impact, thermoplastic housing.
- Charge rate/power on LED indicator light.

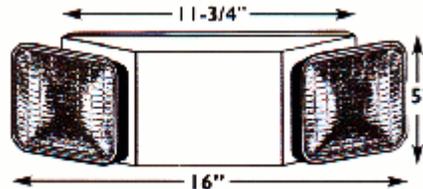

| Model # | Emergency Operation | Voltage Input | Lamp Wattage | Battery Voltage | Damp Location | Warranty | NSN |
|---------------------|---------------------|---------------|--------------|-----------------|---------------|----------|-----|
| R-1 | 90 Min | 120V/277V | 2X5.4W | 6V | Yes | Yes | |
| R-1C (With Cord) | 90 Min | 120V/277V | 2X5.4W | 6V | Yes | Yes | |

Emergency Lighting Units



Model R-5HO

Compact Emergency Lighting Unit has remote capability for up to 2 additional standard remote lighting fixtures.

Features

- Completely self-contained.
- Fully Automatic Operation.
- Compact, low profile design in neutral finish.
- Universal mounting plate with “EZ” Quick Connect for rapid labor saving installation.
- Push to test switch.
- 6-Volt, pure lead, maintenance-free battery.
- Environmentally-coated, solid state charger.
- Automatic, low voltage disconnect (LVD).
- Universal transformer for 120 or 277 VAC.
- Listed for damp location.
- Injection-molded, V-O flame retardant, high impact, thermoplastic housing.
- Charge rate/power on LED indicator light.

| Model # | Watts for 1-1/2 hrs. | Voltage | Total Connected Heads/Fixtures ** | | | Damp Location | Warranty | NSN |
|----------------------------|----------------------|---------|-----------------------------------|-------|-----------|---------------|----------|-----|
| | | | 4 Hrs | 2 Hrs | 1-1/2 Hrs | | | |
| R-5HO | 22 | 6 | 2 | 3 | 4 | Yes | Yes | |
| ** Based on 5.4 watt lamps | | | | | | | | |

Emergency Lighting Units

Remote Lamp Heads



Remote heads are available in either 6 Volt or 12 Volt configurations and several wattage options. Outdoor weatherproof remote heads (WP) are also available.

Order the correct voltage and wattage combination to fit your application

For additional information contact the DSCP Lighting Team
1-800-DLA-BULB

| Catalog # | Number of Heads | Voltage | Wattage | NSN |
|-----------|-----------------|---------|---------|-----|
| RH1-6V5 | 1 | 6 Volt | 5.4 | |
| RH1-6V9 | 1 | 6Volt | 9 | |
| RH2-6V5 | 2 | 6 Volt | 5.4 | |
| RH2-6V9 | 2 | 6Volt | 9 | |
| RH1-12V7 | 1 | 12 Volt | 7 | |
| RH1-12V12 | 1 | 12Volt | 12 | |
| RH2-12V7 | 2 | 12 Volt | 7 | |
| RH2-12V12 | 2 | 12Volt | 12 | |
| RH1-WP | 1 | Specify | Specify | |
| RH2-WP | 2 | Specify | Specify | |