


Fluorescent Fixtures

W1C6 - W1S6 6-Watt Fixtures

AVAILABLE
Green Painted Housing

- Standard Finish
- Clear Anodized Aluminium
- Other Color Available

WEATHERPROOF

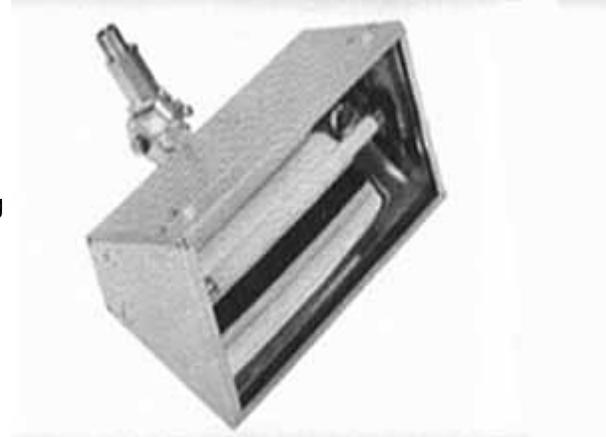

REFLECTOR

Precision formed, highly polished aluminium reflector, scientifically shaped to produce optical magnification. Area of reflecting surface to be 66.718 sq. inches. (430.44 sq.cm).

LENS

Water Clear Acrylic lens is break resistant, will not discolor in sunlight; permits maximum light transmission. Gasketed. Clear Polycarbonate available.

HOUSING

Clear anodized aluminium, with cast aluminium ends; blends with landscape and surroundings. Swivel attachment on back of fixture for stake or conduit mount.

ELECTRICAL SPECIFICATION

Standard - 120 V / 60 HZ. Enclosed-type ballast. Also available in 277 volts, HZ. Conduit mount: wired with #18TFF wire leads. Stake mount: wired with 3 conductor #18SJT9' cord and NEMA plug. U.L. listed "Wet Location". 12 volt DC available.

ADAPTATIONS

Easy surface mounting.

DIMENSIONS

5" (127 mm) X 6.5" (165 mm) X 2.5" (63 mm) X 10" (254 mm)

MODEL	TYPE.	MOUNTING	NSN
W1C6	Single 6 watt	Conduit	
W1S6	Single 6 watt	Stake & Cord	

MAGNARAY®
INTERNATIONAL