


# Fluorescent Fixtures

## W1PL9 - W1PL13 - W1PL18 W2C6

AVAILABLE  
Green Painted Housing

- Standard Finish:
- Clear Anodized Aluminium
- Colors Available

**WEATHERPROOF**

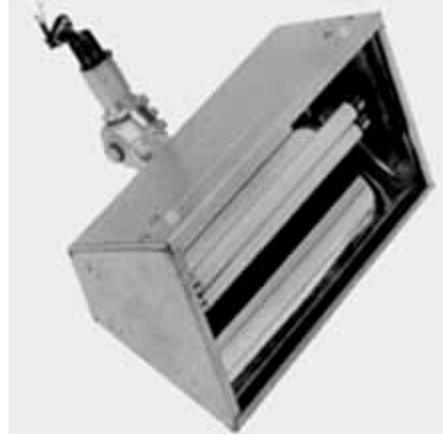

### REFLECTOR

Precision formed, highly polished aluminium reflector, scientifically shaped to produce optical magnification. Area of reflecting surface to be 66.718 sq. inches. (430.44 sq.cm).

### LENS

Water Clear Acrylic lens is break resistant, will not discolor in sunlight; permits maximum light transmission. Gasketed. Clear Polycarbonate available.

### HOUSING

Clear anodized aluminium, with cast aluminium ends; blends with landscape and surroundings. Swivel attachment on back of fixture for stake or conduit mount.

### ELECTRICAL SPECIFICATION


Standard - 120 V / 60 HZ. Enclosed-type ballast. Also available in 277 volts, HZ. Conduit mount: wired with #18TFF wire leads. Stake mount: wired with 3 conductor #18SJT9' cord and NEMA plug. U.L. listed "Wet Location". 12 volt DC available.

### ADAPTATIONS

Easy surface mounting.

### DIMENSIONS

5" (127 mm) X 6.5" (165 mm) X 2.5" (63 mm) X 10" (254 mm)



MODEL	TYPE.	MOUNTING	NSN
W2C6	Double 6 watt	Conduit	
W1PL9	Single 9 PL	Conduit	
W1PL13	Single 13 PL	Conduit	
W1PL18	Single 18 PL	Conduit	

**MAGNARAY®**  
**INTERNATIONAL**