


Fluorescent Fixtures

W2PL40 - W2PL50 - W2PL55EB
W2C40 - W2C40C - W1C32EB-W2C32EB
W1T554EB - W2T554EB

MORE LIGHT
LESS WATTAGE
LESS HEAT

Soft, Even Light.
 Projected Floodlighting.
 Up to 90% Power Savings.
 Optical Magnification

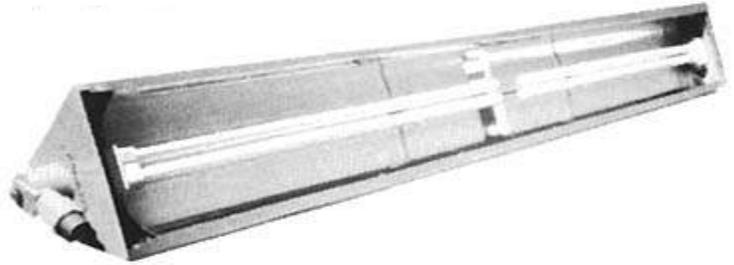

REFLECTOR

Precision formed, highly polished aluminium reflector, scientifically shaped to produce optical magnification. Area of reflecting surface to be 383.105 sq. inches. (247.16 sq.cm).

LENS

Water Clear Acrylic lens is break resistant, will not discolor in sunlight; permits maximum light transmission. Gasketed. Clear Polycarbonate available.

HOUSING

Clear Anodized Aluminium, with Cast Aluminium ends; stainless steel screws attach housing to internal aluminium chassis; Furnished with Knotted 360 conduit type swivels 1/2" (12.7 mm) at each end.

ELECTRICAL SPECIFICATION

Standard - 220V / 50HZ magnetic ballast; hybrid, electronic available, also 120V / 60HZ. UL listed "Wet Location".

ADAPTATIONS

For easy surface mounting, use FB124 brackets. For pole top mounting, use #PT40 Pole Top Mounting Bracket

DIMENSIONS

5" (127 mm) X 6.5" (165 mm) X 2.5" (63 mm) X 51.75" (1314.5 mm)

MODEL	TYPE .	MOUNTING
W 2PL40	Dual PL40 lamp	Conduit
W 2PL50	Dual PL50 lamp	Conduit
W 1C32EB	Single F32T8	Conduit
W 2C32EB	Dual F32T8	Conduit
W 2C40	Dual 34/40 watt	Conduit
W 2C40C	Dual 34/40 watt (cold wx)	Conduit

