


FIXTURES

SPECIALTY

Canopy Light - CL series

Ruuds Canopy Light is a highly efficient fixture that is available for surface (CL Series) or recessed (RC Series) mounting. Offered in 2 sizes: 16" or 22" square (16" square for recessed), all are standard with a high power factor ballast that will operate at -20°F (-29°C) MH.

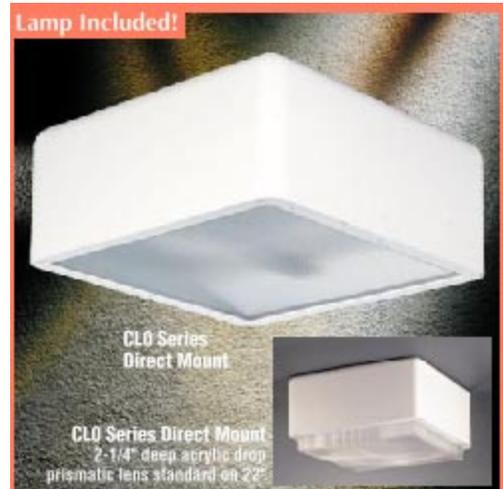

Recessed Canopy Light - RC series



Recessed Downlight - AA series

Brightened, anodized aluminum reflector is enclosed with a clear, tempered glass lens, easily removable for cleaning or relamping. The optical system provides highly efficient distribution while controlling glare. Distribution is field-adjustable by moving the lamp socket—no special tools required.

The 16" Recessed Downlight is suitable for use in accessible ceilings up to 1" thick. The lightweight reflector assembly is supplied with four steel "L" brackets to mount it to the ceiling surface. The ballast assembly is prewired to the reflector assembly with 6 feet of 3/8" flexible metallic




**For additional information and availability please contact the
DSCP Lighting Team at 1 800 DLA BULB**



FIXTURES

SPECIALTY

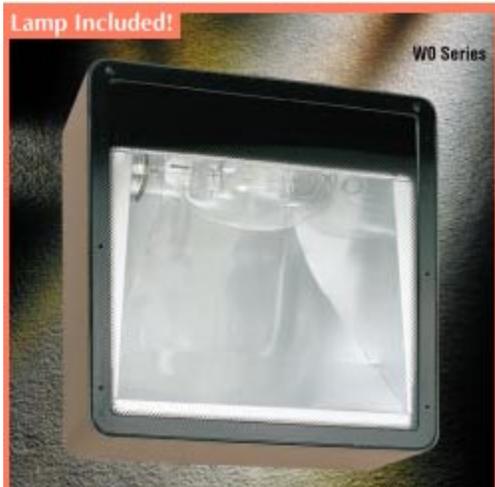


Wall Pack - WO Series

A precision specular reflector provides cutoff wide distribution to assure wide fixture spacings and maximum light levels. The optical chamber is sealed to reduce dirt and insect contamination.

A clear, tempered glass lens is held securely in a die cast, recessed door frame. The lens frame is supplied with mounting holes for field-installed accessories, such as the Polycarbonate Vandal Shield, Wire Guard or Wall Wash/Glare Shield

The housing is supplied with four 0.188" clearance holes for #8 screws. Four #8 x 1" sheet metal screws and sealing washers are provided for a watertight seal.

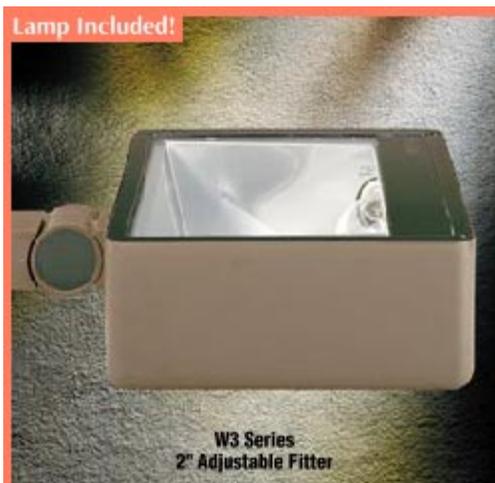

Sign Light (Uplight) - W3 Series

A precision specular reflector provides cutoff wide distribution to assure wide fixture spacings and maximum light levels. The optical chamber is sealed to reduce dirt and insect contamination.

A clear, tempered glass lens is held securely in a die cast, recessed door frame. The lens frame is supplied with mounting holes for field-installed accessories, such as the Polycarbonate Vandal Shield, Wire Guard or Wall Wash/Glare Shield

**For additional information and availability please contact the
DSCP Lighting Team at 1 800 DLA BULB**



FIXTURES

SPECIALTY

60° Forward Throw (Indirect Light)

This compact forward-throw reflector has a main beam of 60°+ from vertical (30° from horizontal), which provides uniform ceiling illumination with little spill light on the wall. An adjustable backlight shield is standard.

A clear, tempered glass lens is held securely in a die cast aluminum door frame. The door frame has a white DeltaGuard acrylic powder finish.

The fixture mounts to the wall with a supplied cast aluminum box. Two 5/16" diameter threaded mounting studs with nuts to attach the fixture to the box are supplied.



60° Forward Throw (Indirect Light)

WACU Series

This compact forward-throw reflector has a main beam of 60°+ from vertical (30° from horizontal), which provides uniform ceiling illumination with little spill light on the wall. An adjustable backlight shield is standard.

A clear, tempered glass lens is held securely in a die cast aluminum door frame. The door frame has a white DeltaGuard acrylic powder finish.

The fixture mounts to the wall with a supplied cast aluminum box. Two 5/16" diameter threaded mounting studs with nuts to attach the fixture to the box are supplied.



**For additional information and availability please contact the
DSCP Lighting Team at 1 800 DLA BULB**

