Compact Fluorescent Lamps





Technical Consumer Products

The two piece Springlamp provides the same features as the one piece, adding the ability to replace the lamp without replacing the electronic adapter base for the maximum cost savings.

SpringLamp Two-Piece/ HPF LTHD / Dimmable										
Item Number	Wattage	Input Line Current	Lumens	Overall Length	Overall Diameter	Power Factor	Harmonic Distortion	Replaceable Lamp	Dimming Range	NSN
15711L	11 watt	.14A	680	5.12"	2.5"	>.90	<33%	GX24 4-pin	100-20%	
15715L	15 watt	.18A	980	5.38"	2.5"	>.90	<33%	GX24 4-pin	100-20%	
15718L	18 watt	.24A	1,200	5.62"	2.5"	>.90	<33%	GX24 4-pin	100-20%	
15723L	23 watt	.28A	1,500	6.0"	2.5"	>.90	<33%	GX24 4-pin	100-20%	

SpringLamp Two-Piece/ NPF HTHD /Non-Dimmable										
Item Number	Wattage	Input Line Current	Lumens	Overall Length	Overall Diameter	Power Factor	Harmonic Distortion	Replaceable Lamp	Dimming Range	NSN
15511L	11 watt	.22A	680	5.12"	2.5"	>.50	<150%	GX24 4-pin	N/A	
15515L	15 watt	.29A	980	5.38"	2.5"	>.50	<150%	GX24 4-pin	N/A	
15518L	18 watt	.36A	1,200	5.62"	2.5"	>.50	<150%	GX24 4-pin	N/A	
15523L	23 watt	.42A	1,500	6.0"	2.5"	>.50	<150%	GX24 4-pin	N/A	
15526L	26 watt	.45A	1,750	6.25"	2.5"	>.50	<150%	GX24 4-pin	N/A	
15532L	32 watt	.50A	2,100	6.75	2.5"	>.50	<150%	GX24 4-pin	N/A	

Compact Fluorescent Lamps

Technical Consumer Products

Replacement modules for the two piece system

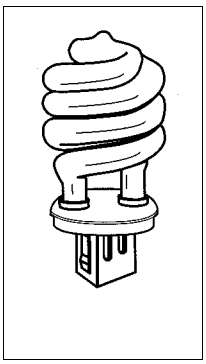





SpringLamps Replacement PL 4-pin		
Item#	Description	NSN
33011	11 watt SpringLamp 2700K	
33015	15 watt SpringLamp 2700K	
33018	18 watt SpringLamp 2700K	
33023	23 watt SpringLamp 2700K	
33026	26 watt SpringLamp 2700K	
33032	32 watt SpringLamp 2700K	
33042	42 watt SpringLamp 2700K	
Electronic Ballast Adapters 4-pin socket HPF/LTHD		
15711	11 watt Electronic Ballasted Adapter DIM HPF	
15715	15 watt Electronic Ballasted Adapter DIM HPF	
15718	18 watt Electronic Ballasted Adapter DIM HPF	
15723	23 watt Electronic Ballasted Adapter DIM HPF	
15726	26 watt Electronic Ballasted Adapter On/Off HPF	
15732	32 watt Electronic Ballasted Adapter On/Off HPF	
15742	42 watt Electronic Ballasted Adapter On/Off HPF	
Electronic Ballast Adapters 4-pin socket NPF/HTHD		
15511	1l watt Electronic Ballasted Adapter On/Off	
15515	15 watt Electronic Ballasted Adapter On/Off	
15518	18 watt Electronic Ballasted Adapter On/Off	
15523	23 watt Electronic Ballasted Adapter On/Off	
15526	26 watt Electronic Ballasted Adapter On/Off	
15532	32 watt Electronic Ballasted Adapter On/Off	
15542	42 watt Electronic Ballasted Adapter On/Off	

TECHNICAL INFORMATION

SpringLamp Series
Specifications (at full brightness]:

Ballast Type:	Electronic
Starting Method.	Modified Rapid Start
*Input Line Voltage:	120VAC
Input Line Frequency:	60HZ
Ballast Life (rated):	30,000 (2-piece)
Lamp Life (rated):	10,000
**color Temperature:	2,700 degrees Kelvin
Color Rendering Index:	84
Minimum Starting Temperature:	-20 degrees F
Maximum Operating Temperature	+160 degrees F

Efficiency/Lumens per Watt:	>60
Adapter Screw-in Base Type:	Edison E-26
U.L./C.U.L. Listed:	YES
FCC Compliance:	Part 18, Subpart C
Lamp Operating Frequency:	45KHZ
Lamp Current Crest Factor:	<1.60
Maximum Open Circuit Voltage:	600V
End Of Life Protection	YES

* Available in 127V, 22OV, 23OV, 24OV, 277V - Special Order.
** Available in 5100 degrees Kelvin - Special Order.

For additional Information and availability Contact the DSCP Lighting Team - 1-800-DLA-BULB