

# HID Fixtures

Bell Lighting Technologies Inc.



## LF / MV Series

**Mechanically Ventilated - Seismic Mounting - Dry Application**


The LF/MV Series comes fully assembled and complete with:

- Quad Series Ballast, 120/208/240/277 V or Tri-Tap 120/277/347 V in 50 or 60 Hz.
- 4mm Tempered Safety Glass panel or optional 4mm Tempered Pinhead Safety Glass.
- Pre-wired 5, including a 1.6m Pigtail.
- Full seismic CSA/UL ceiling mount kit including adjustable chain links and four 1m pre-cut suspension chains.
- Two 10cm tap-in Collars designed to accommodate 10cm ducting.

The LF/MV Series is manufactured from the highest quality ISO Marine Aluminum and is completely welded for superior structural strength. Alternate optional equipment may be available upon request.


<b>M e t a l H a l i d e</b>	N S N
250 W a t t L F 2 5 0 M V - S M - D R - M H	
400 W a t t L F 4 0 0 M V - S M - D R - M H	
1000 W a t t L F 1 0 0 0 M V - S M - D R - M H	
1000 W a t t L F 1 0 0 0 M V - S M - D R - M H C o m p a c t	
<b>H i g h P r e s s u r e S o d i u m</b>	
250 W a t t L F 2 5 0 M V - S M - D R - H P S	
400 W a t t L F 4 0 0 M V - S M - D R - H P S	
600 W a t t L F 6 0 0 M V - S M - D R - H P S	
1000 W a t t L F 1 0 0 0 M V - S M - D R - H P S	

### LF-MV 250 / 400 / 600 LF 1000 Compact

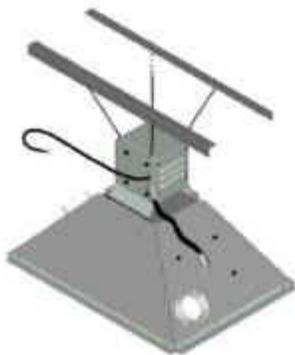

58.4 cm x 40.6 cm x 45.7 cm  
Approximate Weight 16.81 Kg / 37 lbs  
(LU 1000 Compact 26.8 Kg / 59 lbs)

### LF-MV 1000

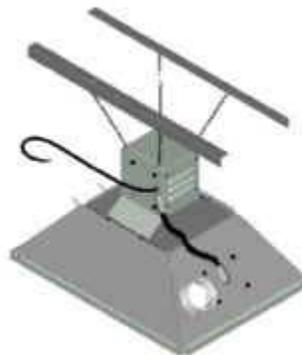

76.2 cm x 55.9 cm x 45.7 cm  
Approximate Weight 26.8 Kg / 59 lbs

BC Light has developed the LF1000 (Compact) fixture for those applications where concentrated light intensity is required. By combining our smaller reflector (used in the LF250, LF400 and LF600 fixtures) with Venture Lighting's reduced jacketed 1000w metal halide lamp we can provide the same total lumen output as our regular LF1000 fixture concentrated on a tighter grid.