




FIXTURES

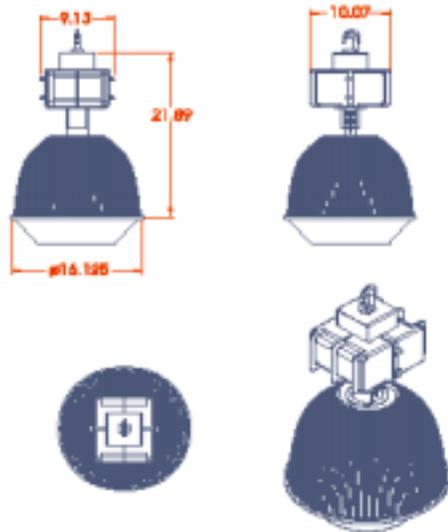

 Lamp: LU250
 Lumens: 27500
 Input Wattage: 305
 Spacing Criteria: 1.9



 Lamp: MH250/U
 Lumens: 20500
 Input Wattage: 294
 Spacing Criteria: 1.9



16" Acrylic Low Bay



Features

Heavy duty, die cast aluminum housing with white powder coat finish. White powder coated junction box with Threaded hole for hook or pendant Mount applications. New bracket Design for easy reflector adjustment to Achieve different photometric patterns. The acrylic reflector has a 92.5 total Luminaires efficiency and is best suited For light colored ceilings due to it's Inherent upright components

Applications

Indoor ceiling heights exceeding 15' Such as large retail stores, warehouse facilities, commercial buildings, where there is a light colored ceiling.

Electrical

U. L. Listed for dry locations.

Options

Wire Guard
 Quartz restrrike
 Glass Lense



Part#	Wattage/Lamp	NSN
Standard Fixture Products		
High Pressure Sodium		
NWLT150HPSACLB16	150 /HPS	
NWLT200HPSACLB16	200 /HPS	
NWLT250HPSACLB16	250 /HPS	
NWLT400HPSACLB16	400 /HPS	
Metal Halide		
NWLT175MHACLB16	175 /MH	
NWLT250MHACLB16	250 /MH	
Pulse Start Fixture Products		
NWLT320MHACLB/PS/16	320 /MH	
NWLT350MHACLB/PS/16	350 /MH	

Pulse Start Comparison		
MH320/PS 34,000 lumens 106 lpw	VS	MH400 36,000 lumens 90 lpw
MH350/PS 38,000 lumens 109 lpw		MS400/BU 40,000 lumens 100 lpw