


FIXTURES

Mid Size Flood

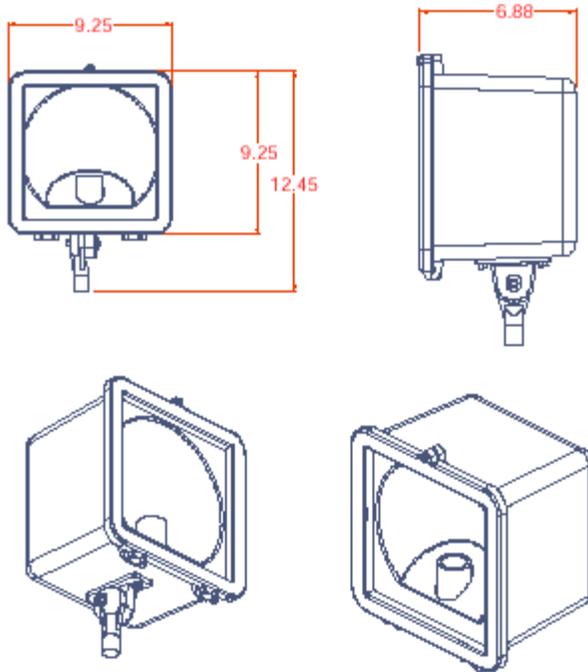

Features

Die cast aluminum dark bronze housing, hinged door with tempered glass lens, moisture and dust proof, anodized aluminum reflector. Threaded ½" apertures securing conduit and installing photocell. Heavy duty swivel provides directional flexibility.

Applications

Parking areas, perimeter lighting, Entrances and walkways, waterfronts, loading platforms, recreational areas, flag lighting, roof lighting.

Electrical

U.L. Listed for wet and damp locations.



High Pressure Sodium				
Watts	Bulb/Base	Lumens	Catalog #	NSN
35	ED-17/Medium		NWLT35HPSMSF	
70	ED-17/Medium		NWLT50HPSMSF	
70	ED-17/Medium	6300	NWLT70HPSMSF	
100	ED-17/Medium	9500	NWLT100HPSMSF	
150	ED-17/Medium	16000	NWLT150HPSMSF	
Metal Halide				
35	ED-17/Medium		NWLT35MHMSF	
50	ED-17/Medium	3200	NWLT50MHMSF	
70	ED-17/Medium	5000	NWLT70MHMSF	
100	ED-17/Medium	8500	NWLT100MHMSF	
150	ED-17/Medium		NWLT150MHMSF	
175	ED-17/Medium	14000	NWLT175MHMSF	